

27/28

FIG. 39


Reception side Transmis- sion side \	Full Cone NAT	R NAT	PR NAT	AS NAT	PS NAT
Full Cone NAT	O	O	O	O	Δ
R NAT	O	O	O	O	Δ
PR NAT	O	O	O	O	Δ
AS NAT	O	O	O	O	Δ
PS NAT	O	O	O	O	×

O : Connection enabled

Δ : Connection enabled by exchanging transmission and reception

× : Connection disabled

FIG. 40 PRIOR ART

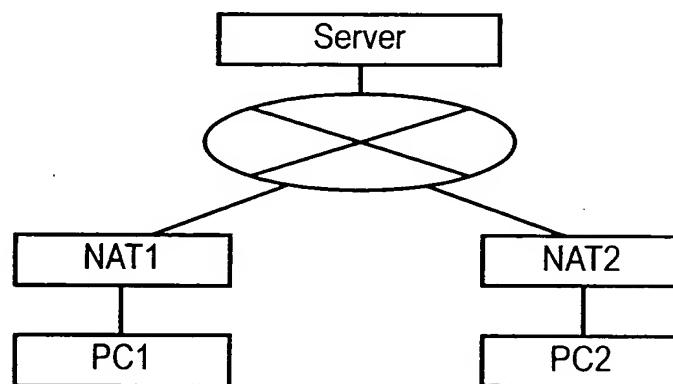

28/28

FIG. 41 PRIOR ART

Reception side Transm- ission side	Full Cone NAT	R NAT	PR NAT	AS NAT	PS NAT
Full Cone NAT	O * 1	O * 1	O * 1	O * 2	O * 2
R NAT	O * 1	O * 1	O * 1	O * 2	O * 2
PR NAT	O * 1	O * 1	O * 1	O * 3	O * 3
AS NAT	O * 1	O * 1	O * 3	O * 3	O * 3
PS NAT	O * 1	O * 1	x	x	x

O : Connection enabled

x : Connection disabled